

NOR-LAKE[®] SCIENTIFIC

SCIENTIFIC, LABORATORY, PHARMACY & PHARMACEUTICAL GRADE

+4°C AUTO DEFROST UNDERCOUNTER REFRIGERATOR

NSPR041WMW/0

Designed to meet the demanding requirements for scientific and laboratory research. Advanced engineered design incorporates the latest in cabinet, refrigeration, temperature control and monitoring features. Provides energy efficient, convenient, safe and reliable performance for optimal storage temperature environments necessary for a wide range of life science, pharmacy, biological, medical, clinical, vaccine and industrial applications.

Standard Features:

- Digital LED display microprocessor temperature controller
- Audible and visual Hi/Lo temperature alarm
- Adjustable control range from +2°C to +8°C; factory preset at +4°C
- Remote alarm contacts
- Continuous temperature display
- Product sensor with glycerin bottle
- Sensor access port 1" diameter
- Exterior cabinet front, sides and top are painted white
- Exterior cabinet back and bottom are galvanized steel
- Interior cabinet liner and interior door are smooth aluminum
- Cabinet and solid door are foamed-in-place with EPA-compliant high-density polyurethane foam insulation
- Heavy-duty solid door with self-closing hinges
- Pull door handle
- Magnetic door gasket
- Centered key door lock (2 keys)
- Solid base with leveler legs
- One (1) coated wire shelf
- Air cooled condensing unit
- Base mounted forced air front-breathing refrigeration system
- Automatic defrost and condensate evaporation
- Air intake and exhaust through the base of the unit for build-in on three sides
- Condenser filter screen for easy maintenance
- Field reversible door
- Warranties: 18 month parts and labor, 5 year compressor (US and Canada), 18 months parts (International)
- UL, C-UL listed

Optional Features:


- Data Logger/Thermometer Monitor with Digital Display with alarm (field install)
- Extra shelf
- Casters in lieu of base
- Legs in lieu of base
- Stainless steel interior
- Stainless steel exterior
- Temperature chart recorder with chart paper
- 4-20ma output
- Export crating
- Stacking kit



NSPR041WMW/0




NORLAKE[®] SCIENTIFIC




Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816


NOR-LAKE SCIENTIFIC
A Division of
NOR-LAKE, INCORPORATED
727 Second Street
P.O. Box 248
Hudson, Wisconsin 54016
800-477-5253
715-386-2323
800-388-5253 PARTS
715-386-4290 FAX
www.norlakescientific.com

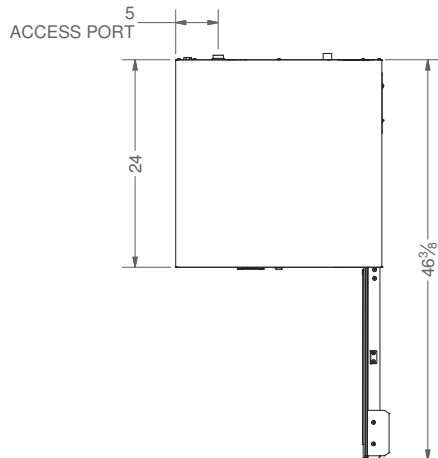

TOP VIEW

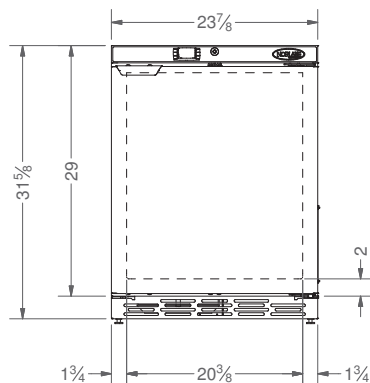

FRONT VIEW

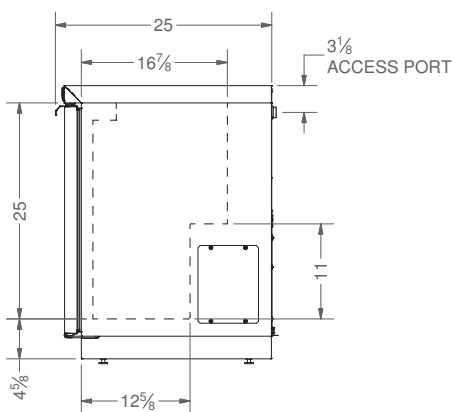

SIDE VIEW

SPECIFICATIONS

Model	NSFPR041WMW/0
Crated Weight (lbs) (kg)	125 (57)
Crated Height (in) (cm)	39 (99)
Crated Width (in) (cm)	29 (74)
Crated Depth (in) (cm)	30 (76)
Interior Height (in) (cm)	25 (63)
Interior Width (in) (cm)	20-3/8 (52)
Interior Depth (in) (cm)	16 (41)
Overall Height (in) (cm) *	31-5/8 (80)
Overall Width (in) (cm)	23-7/8 (60)
Overall Depth (in) (cm)	25 (63)
Gross Cubage (CuFt) (L)	4.2 (119)
Number of Shelves	1
Shelf Area (SqFt) (Sqm)	3.9 (0.4)
Condensing Unit Size	1/5 HP
Refrigerant	R-134a
Electrical Characteristics	115/60/1
Cord & Plug Furnished	Yes
NEMA Plug	5-15P
Total Amp Draw	3.6

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with the standard base. With casters, the overall height is 31-1/2". With legs, the overall height is adjustable from 31-1/2" to 32".

Voltage Model Suffix Code	Voltage Description	NEMA Plug	NEMA Receptacle
/0	115/1PH/60HZ	5-15P	5-15R



Revision Date: 07/15
©2015 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 158058