

# NORLAKE<sup>®</sup>

## GRAND<sup>™</sup> SERIES GLASS DOOR REFRIGERATORS

Nor-Lake's advanced engineered commercial design incorporates the latest in cabinet, refrigeration and temperature control and monitoring features. Full size Reach-in Refrigerators provide energy efficient, convenient, safe and reliable performance for optimal storage temperature environments necessary for a wide range of commercial and industrial cold storage applications.

### Standard Product Features:

- Digital LED display microprocessor temperature controller
- Selectable °F or °C control
- Visual Hi/Lo temperature alarm
- Adjustable control range from +2°C to +10°C (+35.6°F to +50°F) ; factory preset at +4°C (+39°F)
- Door open alarm
- Continuous temperature display
- Condenser cleaning reminder alarm
- Power supply switch
- Exterior cabinet front and sides are stainless steel
- Exterior cabinet top, back and bottom are galvanized steel
- Interior cabinet liner is stainless steel
- Cabinet is foamed-in-place with CFC-free high density polyurethane foam insulation
- Full-length glass door(s) with pivot hinges. Self-closing with 90° stay open feature
- Magnetic door gaskets
- Top mounted key door lock(s) (2 keys)
- 4 casters (2 locking) on one and two door models, 6 casters (3 locking) on three door model
- Field installation of casters required
- 4 vinyl coated wire shelves per door section
- Perimeter anti-condensate door frame heater wires
- Interior light, switch activated
- Bottom mounted air cooled condensing unit
- Top mounted forced air cooling coil
- Automatic defrost and condensate evaporation
- Warranties: 18 month parts and labor, 5 year compressor (US and Canada), 18 months parts (International)
- UL, C-UL, ETL Sanitation, ENERGY STAR<sup>®</sup> listed

### Optional Features:

- Data Logger/Thermometer Monitor with Digital Display with alarm (field install)
- Extra shelf
- Legs in lieu of casters (6")



GR23SSG/0




GR49SSG/0

GR72SSG/0


NOR-LAKE, INCORPORATED  
727 Second Street  
Hudson, Wisconsin 54016  
800-477-5253  
715-386-2323  
800-388-5253 PARTS  
715-386-4290 FAX  
www.norlake.com




Committed to our environment



GR23SSG/0  
FRONT

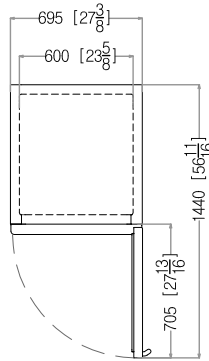

GR23SSG/0  
TOP

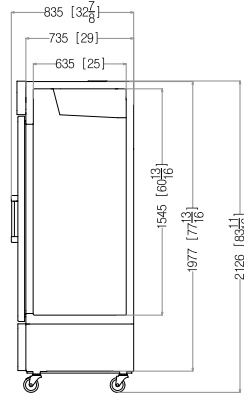

SIDE VIEW  
ALL MODELS


**SPECIFICATIONS**

Models	GR23SSG/0	GR49SSG/0	GR72SSG/0
Crated Weight (lbs) (kg)	308 (139)	483 (217)	653 (294)
Crated Height (in) (cm)	84-1/4 (211)	84-1/4 (211)	84-1/4 (211)
Crated Width (in) (cm)	29-1/8 (73)	56-3/4 (142)	78-3/8 (196)
Crated Depth (in) (cm)	33-1/2 (84)	33-1/2 (84)	33-1/2 (84)
Interior Height (in) (cm)	61 (153)	61 (153)	61 (153)
Interior Width (in) (cm)	23-3/4 (59)	51-1/2 (129)	74-1/4 (186)
Interior Depth (in) (cm)	27 (68)	27 (68)	27 (68)
Overall Height (in) (cm) *	83-3/4 (209)	83-3/4 (209)	83-3/4 (209)
Overall Width (in) (cm)	27-1/2 (69)	55-1/4 (138)	78 (195)
Overall Depth (in) (cm)	33 (83)	33 (83)	33 (83)
Gross Cubage (CuFt) (L)	23 (651)	49 (1387)	70 (2002)
Number of Shelves	4	8	12
Shelf Area (SqFt) (Sqm)	18 (1.67)	39 (3.6)	56.5 (5.25)
Number of Casters **	4	4	6
Condensing Unit Size	3/8 HP	3/5 HP	3/5 HP
Refrigerant	R-134a	R-404a	R-404a
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Cord & Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	5.0	6.8	7.6


Specifications subject to change without notice.

\* The overall heights shown in the table and drawings are with casters.


\*\* Field installation of casters required.

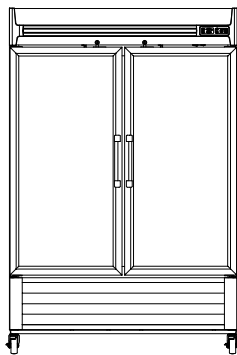


GR49SSG/0  
FRONT



GR49SSG/0  
TOP

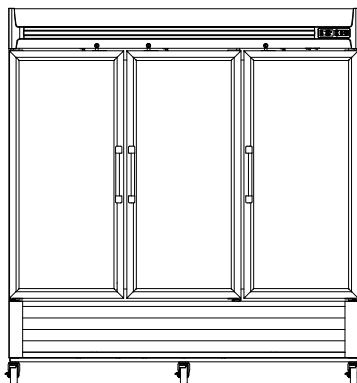

GR72SSG/0  
FRONT

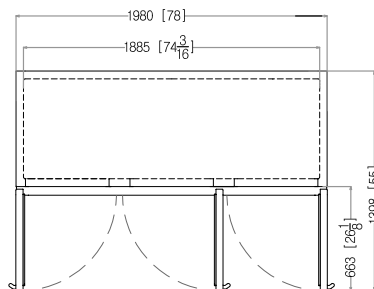

GR72SSG/0  
TOP

Voltage Model Suffix Code	Voltage Description	NEMA Plug	NEMA Receptacle
/0	115V, 1PH, 60HZ	5-15P	5-15R



NOR-LAKE INCORPORATED  
Revision Date: 08/15  
©2015 NOR-LAKE, INC.  
Printed in the U.S.A.  
Part Number: 160948

